



**RUST
BUSTER**
FRAMEWORKS

RB1014
'76-'86 CJ-7
Front Lubeable Shackles



REQUIRED TOOLS

Ratchet
(2) $\frac{3}{4}$ " Socket

KIT CONTAINS

Steel Plate
 $\frac{1}{2}$ " Zinc Plated Steel Bolt w/ Grease Fitting
.5" Steel Bushing
 $\frac{1}{2}$ " Hex Nut
 $\frac{1}{2}$ " Zinc Plated Steel Bolt
Poly Bushing

QTY

4
4
2
6
2
8






**RUST
BUSTER**
FRAMEWORKS

RB1014
'76-'86 CJ-7
Front Lubeable Shackles

- 1) The Greasable Bolts will need to be tightened to 30ft-lbs
- 2) The Steel center bolt will need to be tightened to 55ft-lbs
- 3) Each bolt will need to be re-tightened after 100 miles of use

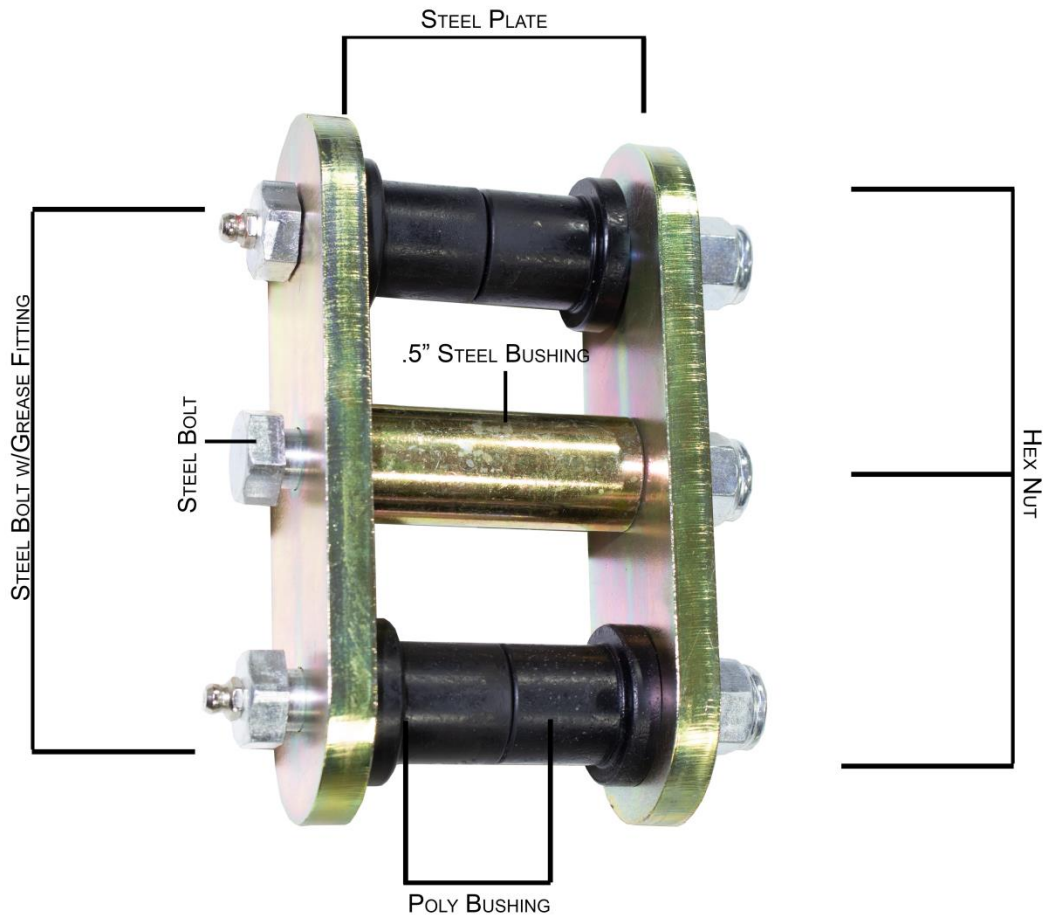



**RUST
BUSTER**
FRAMEWORKS

RB1014
'76-'86 CJ-7
Front Lubeable Shackles

